



Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

**Единый адрес для всех регионов: <http://dhollift.nt-rt.ru> || [dnh@nt-rt.ru](mailto:dnh@nt-rt.ru)**

# DH-LMQ.07-10

## Традиционный гидроборт

## Технические характеристики




→ Cantilever lift for light commercial vehicles

## DH-LMQ.07 / 10 • 500 - 1000 kg




The DH-LMQ.07 (500-750 kg) and DH-LMQ.10 (500-1000 kg) are equipped with premounted mounting plates at a fixed centre distance. This strong 4-cylinder construction without cross tube allows to **save weight** and to leave the **spare wheel in its original position** (in most cases), without compromising on stability.

DH-LMQ



DH-LC.07  
DH-LM.10



### Lift capacity

| CAP         | CG     | LM      |
|-------------|--------|---------|
| 500 kg      | 600 mm | 3 kNm   |
| 750 kg      | 750 mm | 5.6 kNm |
| 1000 kg (*) | 750 mm | 7.5 kNm |


(\*) DH-LMQ.10 only

### Weights [see pg. 15]

| LMQ.07  |        | LMQ.10  |        |
|---------|--------|---------|--------|
| 1250 mm | 180 kg | 1250 mm | 195 kg |
| 1450 mm | 188 kg | 1450 mm | 203 kg |
| 1600 mm | 194 kg | 1600 mm | 209 kg |

Weights incl. CE bumper

# Light-weight 4-cylinder lift for short overhang

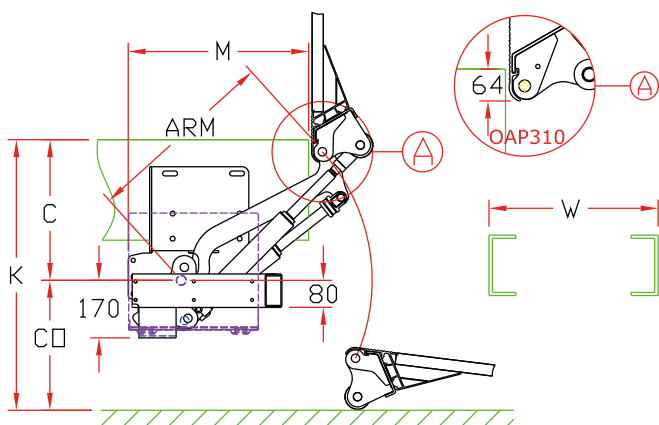


## Fitting dimensions

| ARM     |           | 570<br>LMQ.07 | 650  | 750<br>LMQ.10 | 850 (*) |
|---------|-----------|---------------|------|---------------|---------|
| K max.  |           | 980           | 1060 | 1220          | 1380    |
| C max.  |           | 500           | 530  | 610           | 690     |
| C min.  |           | 250           | 300  | 300           | 350     |
| CO max. |           | 480           | 530  | 610           | 690     |
| M       | at C max. | 450           | 540  | 600           | 660     |
| M       | at C min. | 650           | 710  | 815           | 905     |

(\*) 850 arms optional. Preferably use DH-LM.15. Consult DHOLLANDIA for the optimum solution

## Technical specifications



|                                    |                                                                           |
|------------------------------------|---------------------------------------------------------------------------|
| Lift frame                         | Compact lift frame without cross beam                                     |
| Cylinders                          | 2 lift cylinders + 2 tilt cylinders                                       |
| Type of ride [see pg. 8-9]         | Wedged platform. Level ride + automatic tilt at ground level              |
| Platform material                  | Light weight aluminium                                                    |
| Platform overlap under floor       | -64 mm                                                                    |
| Standard platform depths           | LMQ.07: 1250 - 1450 - 1600 max.<br>LMQ.10: 1250 - 1450 - 1600 - 1800 max. |
| Standard platform widths           | Free up to 2550 in steps of 5 mm                                          |
| Lift arm lengths                   | LMQ.07: 570 mm<br>LMQ.10: 650 - 750 - 850 mm                              |
| Lift arm widths CA                 | CA=870 W=755 • CA=975 W=860                                               |
| Standard control unit [see pg. 11] | OAE039.BP                                                                 |
| Standard finish of the lift frame  | Protection PLUS [OAT102]                                                  |



Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

**Единый адрес для всех регионов: <http://dhollift.nt-rt.ru> || [dnh@nt-rt.ru](mailto:dnh@nt-rt.ru)**